

camSPECS

Advanced spectral sensitivity measurements

The camSPECS express combines all interference filters into one “test chart” to improve the convenience of a spectral sensitivity measurement of a camera. This device makes spectral sensitivity measurements much faster and more convenient.

Main Features

- * Spectral sensitivity measurements
- * 39 high quality interference filters
- * Advanced analysis software included
- * Color transform generation
- * Visual evaluation of ICC profiles with real images



camSPECS XL and TE292

The camSPECS XL uses the same interference filters, but now each has a diameter of 22 mm making it more suitable for wide-angle cameras from industries such as automotive or security.

The TE292* has been adapted from the front plate of the camSPECS device. This chart has been developed to be used primarily with the LE7 for camera calibration with iQ-LED illumination.



LE7 with the TE292 XL chart



camSPECS XL


camSPECS software

Both of the camSPECS options come with evaluation software. This software calculates the spectral sensitivity with the images and the calibration data of the filters as a direct measurement. The software also includes a module that can be used to evaluate the color correction matrix (CCM) for the camera.

Color transform generation is possible once the spectral sensitivities are determined. This process is done by converting camera values to color metric values.

Software Features

- * Measuring spectral sensitivity
- * Creation of ICC profiles
- * Support for 2D and 3D-MLUT color transforms
- * CIECAM16 implementation
- * Calculation of spectral sensitivity with images of iQ-LED devices

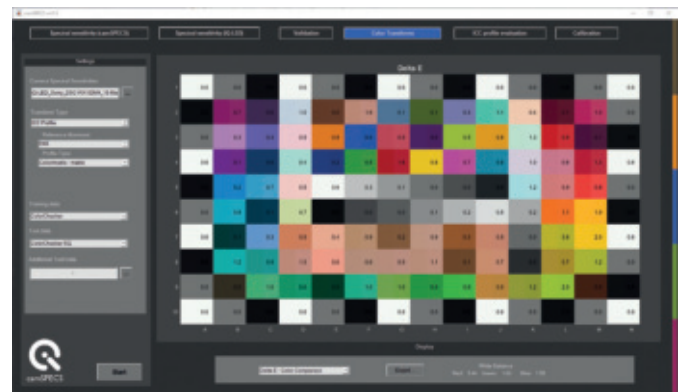

Color transform evaluation

At a Glance	camSPECS	camSPECS XL
Principle	Illumination box with narrow-band interference filters	
Light source	Halogen (24V / 250 W) Osram 64657 HLX	
Durability of light source	300 h	
Wavelength range	380 - 760 nm (10 nm steps)	
Bandwidth	10 nm	
Diameter interference filters	10 mm	22 mm
Diameter ND filters	6 mm	12 mm
Software system requirements	PC with Windows 7 operating system (or higher)	
Additional functions	<ul style="list-style-type: none"> • Spectral measurement with iQ-LED technology • Test procedure for evaluating CCMs with different training data • Digital camera RAW file processing / dark frame subtraction / batch processing • Validation by comparing camera and predicted RGB values • Calibration with an included calibration spectro radiometer • Side by side comparison of images with separate ICC profiles • Export all results to XML or plain text files 	